


Flow Heater

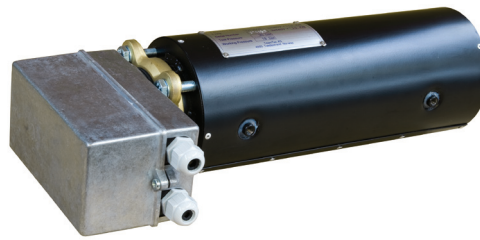

Application:

NWC flow heater for temperature maintenance in cooling plants. NWC Oil pre-heater 2kW - 3x254/440V consisting of flow vessel with 3/8" connector for in- and outlet and mounting legs. Mounted with heating bulb, designed from brass flange with 4 off bolt holes, 3 off heating elements brazed on, equipped with terminal box IP 54 with 1 off thermostat type EGO 30-110°C +/- 1°C (319001) and 1 off temperature limiter type EGO 50-110°C (32945) with manual reset.

The oil pre-heater is primed, painted in RAL 9017 and delivered insulated with steel jacket painted in RAL 9017.

Can be delivered for water or oil; for various wattage and voltage and in different sizes according to customer's requirements.

Part No.:

Standard version as shown on photo: 188523-4

Technical data:

Specific watt load:	2.35W/cm ²
Material vessel:	St. 37
Heating elements:	AISI 304
Test pressure:	25 bar
Painting:	RAL 9017